



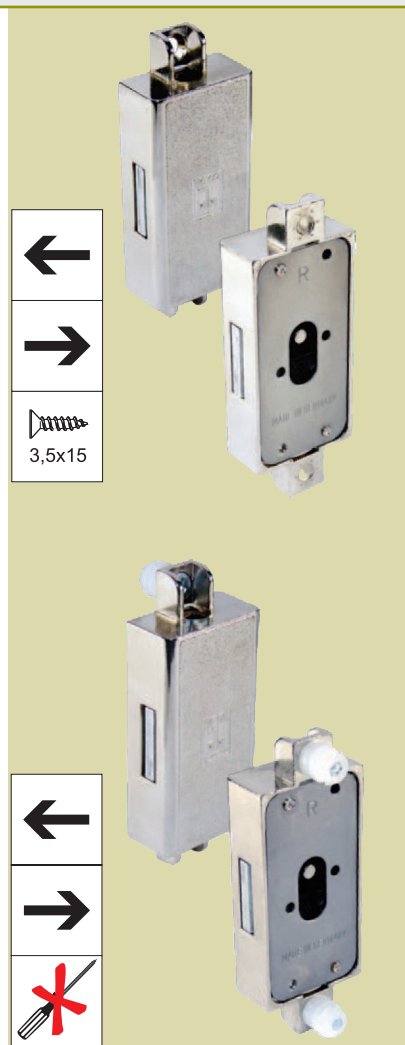


OMSCHRIJVING

Draaistangslot 700 in zamak

om te schroeven

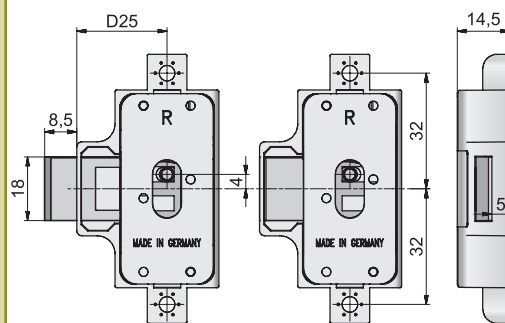

Draaistangslot 709 in zamak

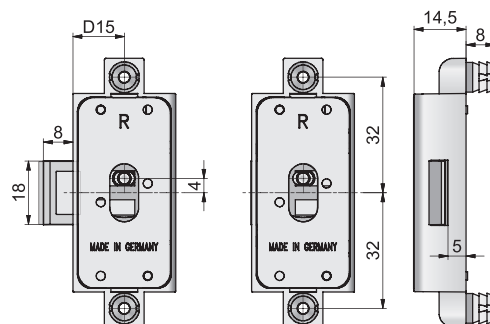met drevels, boring $\varnothing$ 8 mm

DOORN

CODE

VERNIKKELD

BRONS

links

links

zonder schieter

2325-3100

15 mm

2325-3715

2325-3115

20 mm

2325-3720

2325-3120

25 mm

2325-3725

2325-3125

30 mm

2325-3730

2325-3130

rechts

rechts

zonder schieter

2325-3101

15 mm

2325-3716

2325-3116

20 mm

2325-3721

2325-3121

25 mm

2325-3726

2325-3126

30 mm

2325-3731

2325-3131

15 mm

2325-4715

2325-4115

20 mm

2325-4720

2325-4120

25 mm

2325-4725

2325-4125

30 mm

2325-4730

2325-4130

rechts

rechts

15 mm

2325-4716

2325-4116

20 mm

2325-4721

2325-4121

25 mm

2325-4726


2325-4126

30 mm


2325-4731

2325-4131



Toepassingsvoorbeeld



Boormaat

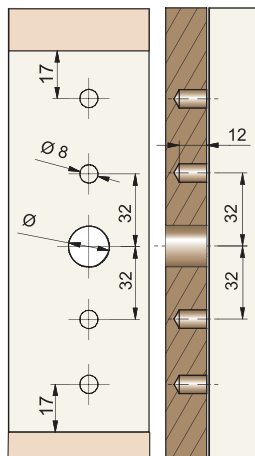

Installatie

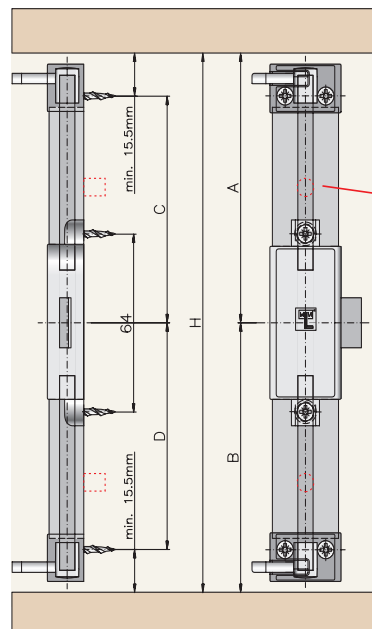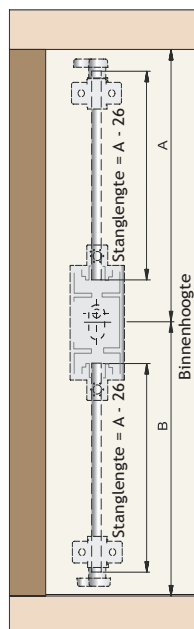

Profielclips gepositioneerd dicht bij het slot 64 mm vanaf het midden van de slot. 8 x 10 mm.



Stanglengte
A/B - 28 mm
C/D - 12 mm

Lengte afdekprofiel
A/B - 47 mm
C/D - 38,5 mm

Technische tekening

