

BASELIFT CORNER 6313LA - Floor Mounted



59.5 x 59.5 cm
90° front edge, 90° wall

Functions and advantages

- Can be equipped with hob
- 30 cm height adjustment
- Adjustable depth, 56 – 59 cm from wall
- Frame in aluminium. Prepared from factory. Movable (sideward) and angle adjustable consoles.
- Electronic and motor system "Plug and Play"
- Safety strip covers the front edge under the worktop. (Installed from factory)
- Brackets and screws for installation of fronts and worktop are included in the delivery

Article Info

Art.no
6313LA-0595

Description
BASELIFT CORNER 6313LA - Floor Mounted

EAN
7340193103595

Specifications

Installation

Floor-mounted

Front height

40 mm

Corner solution

90° front edge, 90° wall

Height adjustment

Motorised, steplessly adjustable 300 mm (700-1000 mm excl. top board)

Speed level

30 mm/sec.

Operation

Recessed mounted button or radio control

Safety

The safety strip is placed under the front edge of the worktop. If anything touches the safety strip, the lifting unit stops.

Electrical connection

Plug for 230 V, 2 x 5A

Plumbing connections

Connection is made with flexible hoses

Lifting force

100 kg

IP-class

IP 20

Frame depth

560-590 mm from wall

Dimensions cover plates

2 pcs, height 438 mm, thickness 12-20 mm

Width worktop

Width = width of the lift

Depth worktop

565-630 mm (15 mm shallower than worktops on fixed cabinets)

Space to wall / adjoining cabinet

5 mm

Space to wall (for tiles)

15 mm

Tiling

From 700 mm above floor (alternatively all the way down to the floor)

Delivery modules

Ready-mounted worktop incl. safety switch, motors

Fittings supplied

Bracket for fronts and top board




Material

Aluminium frame

Warranty

2 years Warranty

This product is covered by a 2-year warranty against manufacturing defects.

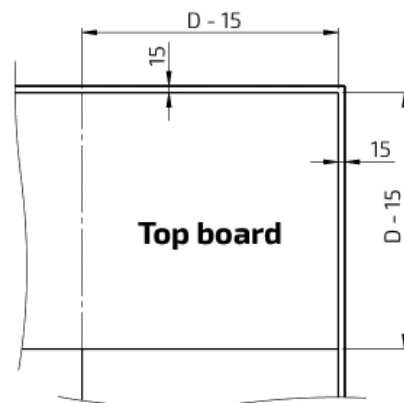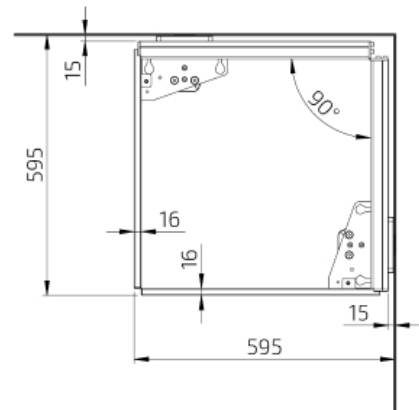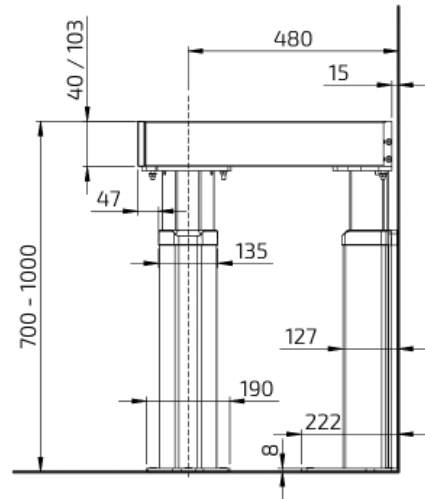

D = Depth of top board on fixed cabinets