


## CENTERLIFT 6490HA - 289,0 cm

- White, RAL 9003

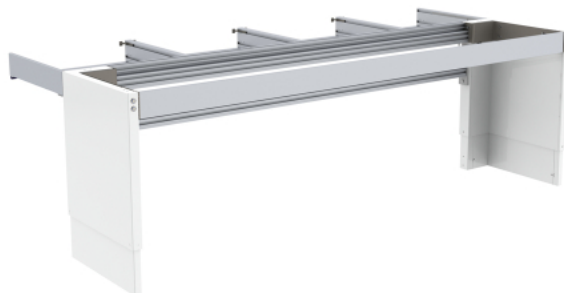

**CENTERLIFT 6490** is a motorised kitchen island.

With cabinets on one side and open space on the other side, a height-adjustable work area is created with space for knees on one side and generous storage space on the other. CENTERLIFT creates a kitchen in which everyone can work comfortably while also providing a natural place for people to gather in the kitchen on all occasions.

The lifting system can be integrated with kitchens from any kitchen manufacturer.

### Functions and advantages

- Motorised kitchen island lift for cabinets and the part with space for knees
- Height-adjustable 70-110 cm above floor (excl. worktop)
- 400 kg lifting power
- Safety switch under storage cabinet and the part with space for knees.

### Useful information

- Fittings for worktop and fronts are included
- Worktop width = lift width + thickness of side cover + desired protrusion
- Worktop depth = lift depth (1106 mm) + thickness of front cover + desired protrusion
- Electronics and motor system "Plug and Play"
- Cover panel can hide installations under the worktop on the side with space for knees 1 pc, width = width of lift, height 510 mm, thickness 12-20 mm

### Standard equipment

- Factory-mounted aluminium system
- Floor-mounted motors
- Control button
- Safety switch at the part with space for knees

### Article Info

**Art.no**  
6490HA-289-01

**Description**  
CENTERLIFT 6490HA - 289,0 cm  
- White, RAL 9003

**EAN**  
7340193104936

# Specifications

## Material

Motor units in lacquered steel (S235JRG2). Aluminium beams Aluminium frame for the part with space for knees

## Installation

Floor mounted

## Height adjustment

Motorised, steplessly adjustable 400 mm  
(700-1100 mm excl. top board)

## Speed level

20 mm/sec.

## Operation

Recessed mounted buttons located in the motor units (left and right side)

## Safety

Safety switches under the cabinet and under the front of spaces for knees. The function of the safety switch is to stop the movement if it comes in contact with any object.

## Electrical connection

Plug for 230 V, 2 x 5A

## Plumbing connections

Connection is made with flexible hoses

## Lifting force

400 kg

## IP-class

IP 20

## Frame depth

1106 mm

## Front height - open side

103 mm

## Dimensions cover plates - open side

1 pc, width = width of lift, height 510 mm, thickness 12-20 mm

## Width worktop

Width of lift + thickness of the side cover + Desired protrusion

## Depth worktop

Depth of lift (1106 mm) + thickness of the front cover + Desired protrusion

## Delivery modules

1 package with motor units. 1 package with length-dependent beams. 1 package with ready-mounted aluminium system for the part with space for knees

## Fittings supplied

Bracket for fronts and top board

## Warranty

2 years Warranty

This product is covered by a 2-year warranty against manufacturing defects.

