


Hardware for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.).
Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


Technical specifications

- 6–25 kg (13 to 55 lbs.)
- 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")

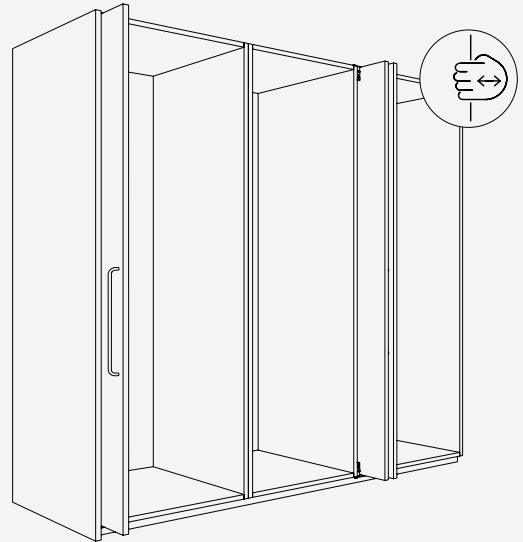



Installation examples

Door striking against the top and bottom cabinet sections

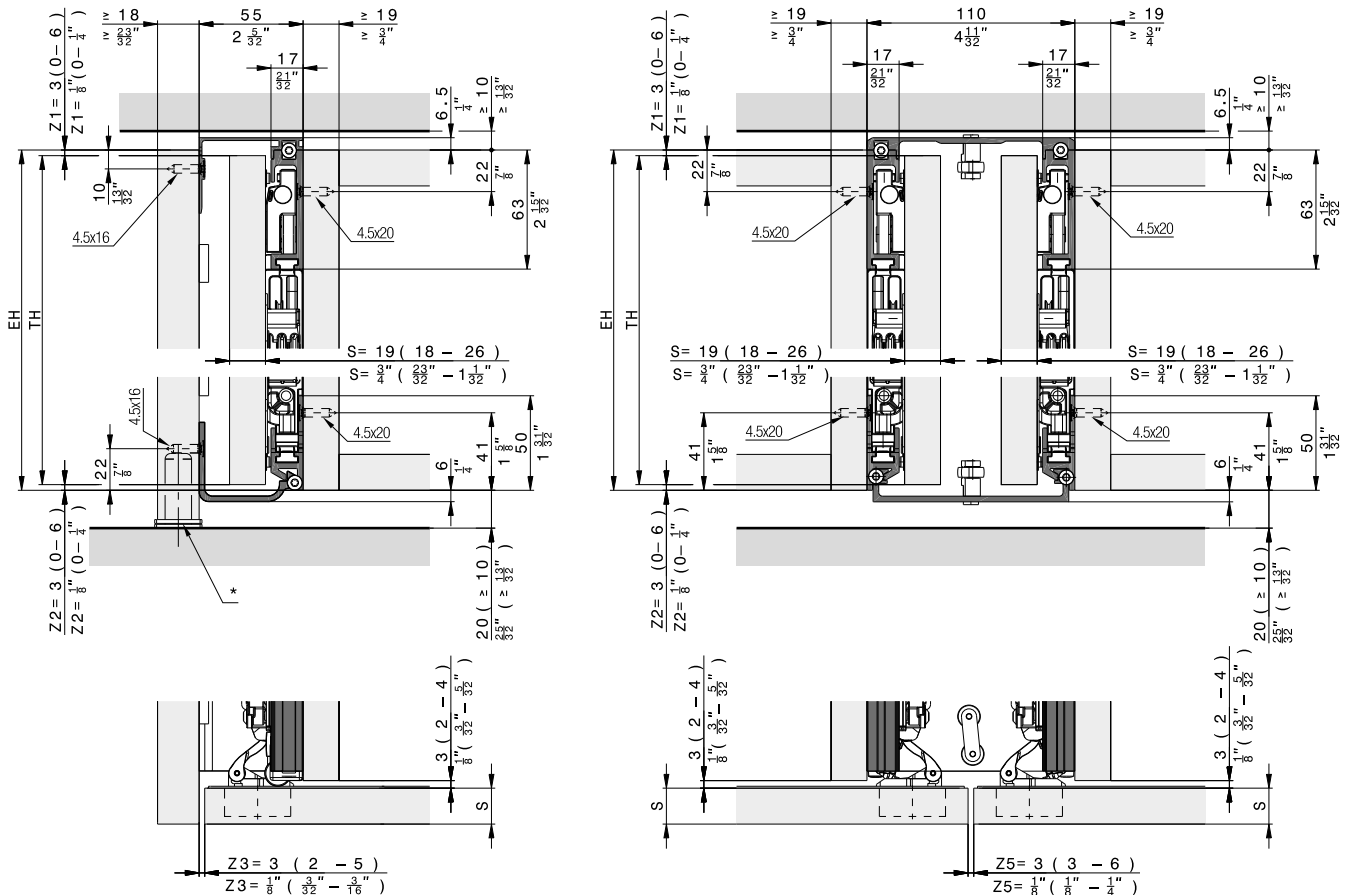

* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III 25 Pull, left

No.	
30994	Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
31000	Hawa Concepta III 25/35 Pull, slide-in set, left
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Hawa Concepta III 25 Pull, right

No.	
30995	Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
31001	Hawa Concepta III 25/35 Pull, slide-in set, right
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta

	440	500	550	600	650	700	750
2200	25	25	25	25	25	25	24
2150	25	25	25	25	25	25	23
2100	25	25	25	25	25	24	23
2050	25	25	25	25	25	24	22
2000	25	25	25	25	25	23	21
1950	25	25	25	25	24	22	21
1900	25	25	25	25	23	21	20
1850	25	25	25	24	22	21	19
1800	25	25	25	23	21	20	19
1750	25	25	25	22	21	19	18
1700	25	25	24	22	20	19	17
1650	25	25	23	21	19	18	17
1600	25	24	22	20	18	17	16
1550	25	23	21	19	18	16	15
1500	24	22	20	18	17	16	15
1450	23	21	19	17	16	15	14
1400	22	20	18	17	15	14	13
1350	21	19	17	16	15	14	13
1300	20	18	16	15	14	13	12
1250	19	17	15	14	13	12	11
1200	18	16	15	13	12	11	11

DE Türgewicht in kg / FR Poids de porte en kg /
EN Door weight in kg / IT Peso anta in kg /
ES Peso de puerta en kg

	1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"
7' 2 5/8"	55	55	55	55	55	55	53
7' 0 21/32"	55	55	55	55	55	55	51
6' 10 11/16"	55	55	55	55	55	53	51
6' 8 23/32"	55	55	55	55	55	53	49
6' 6 3/4"	55	55	55	55	55	51	46
6' 4 25/32"	55	55	55	55	53	49	46
6' 2 13/16"	55	55	55	55	51	46	44
6' 0 27/32"	55	55	55	53	49	46	42
5' 10 7/8"	55	55	55	51	46	44	42
5' 8 29/32"	55	55	55	49	46	42	40
5' 6 15/16"	55	55	53	49	44	42	37
5' 4 31/32"	55	55	51	46	42	40	37
5' 3"	55	53	49	44	40	37	35
5' 1 1/32"	55	51	46	42	40	35	33
4' 11 1/16"	53	49	44	40	37	35	33
4' 9 3/8"	51	46	42	37	35	33	31
4' 7 1/8"	49	44	40	37	33	31	29
4' 5 5/32"	46	42	37	35	33	31	29
4' 3 3/16"	44	40	35	33	31	29	26
4' 1 7/32"	42	37	33	31	29	26	24
3' 11 1/4"	40	35	33	29	26	24	24

DE Türgewicht in lbs. / FR Poids de porte en lbs. /
EN Door weight in lbs. / IT Peso anta in lbs. /
ES Peso de puerta en lbs.




Hawa Configurator

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995



Set consisting of:

		30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces	1	1	31585
	Set of adjusting tools	1	1	31047
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, right	31001





Set consisting of:

		31000	31001	No.
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

		Nr.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

	No.
	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32" to 5' 9 7/8"), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.073


Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.080




Aluminum, black anodized

		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32" to 5' 9 7/8"), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.076



Straightening fitting

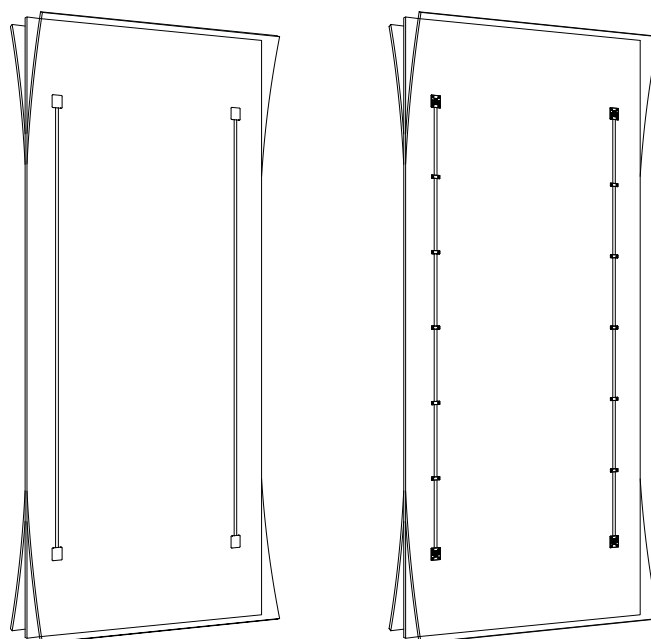

Further installation examples Composed cabinet

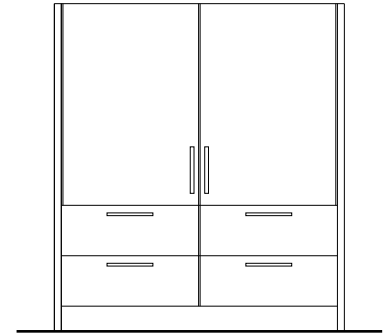
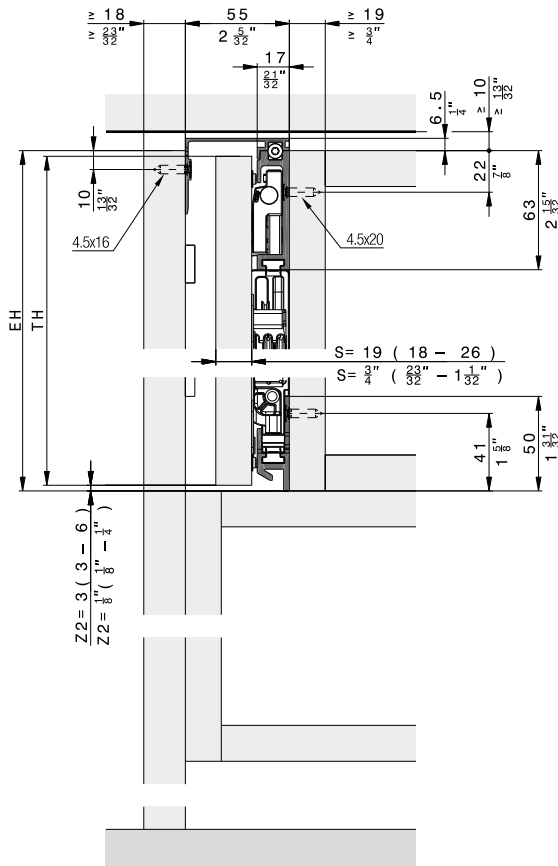


Cabinet without base panel

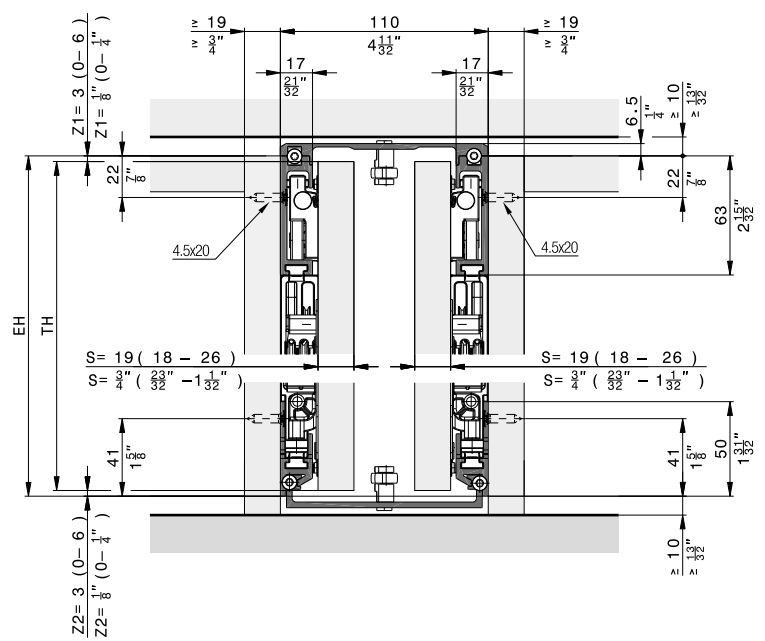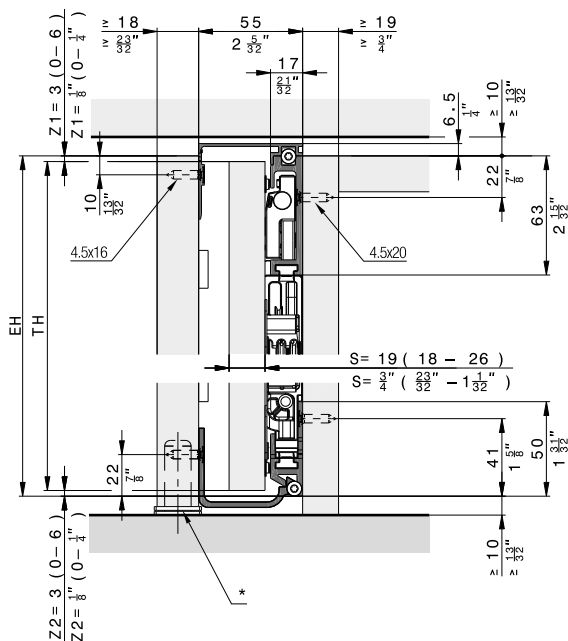


* Recommendation: Use adjustable foot

Inlaid doors

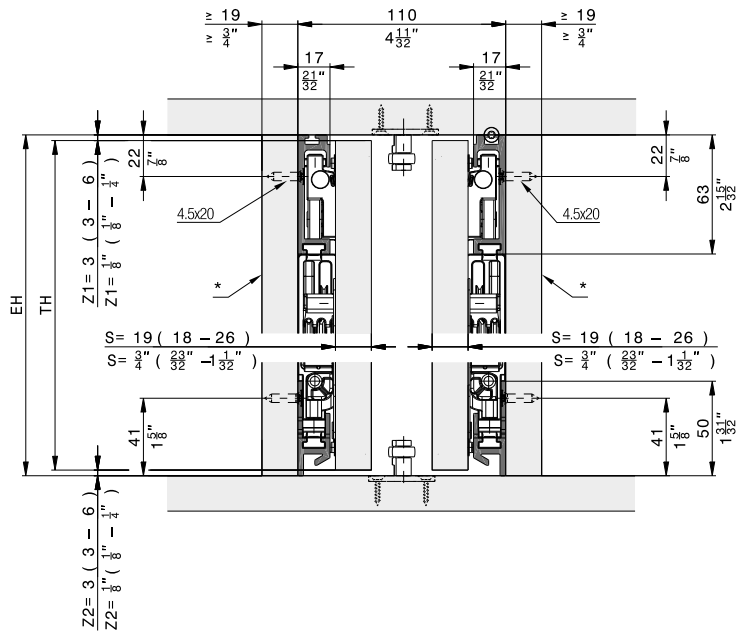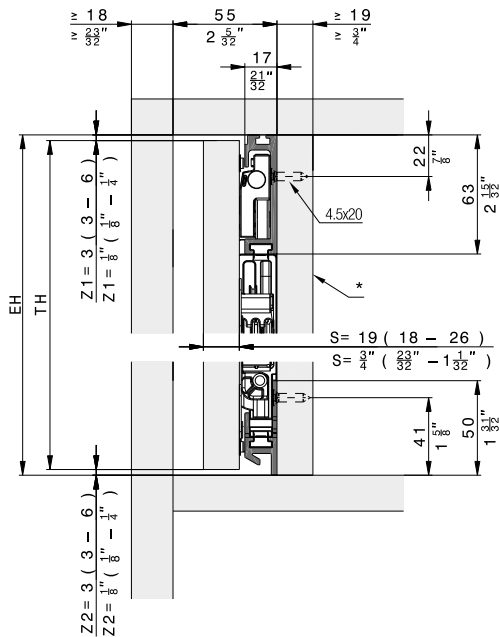


* removable

Floor-to-ceiling doors

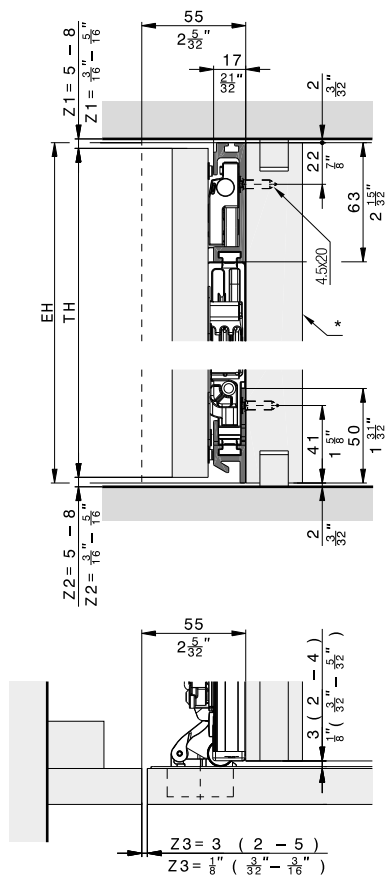

* removable


Hardware depth calculation

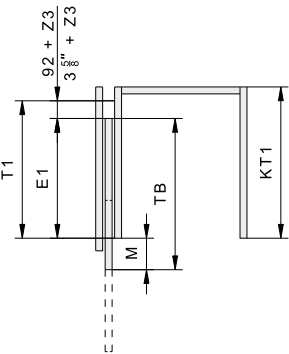


	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₁₆ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

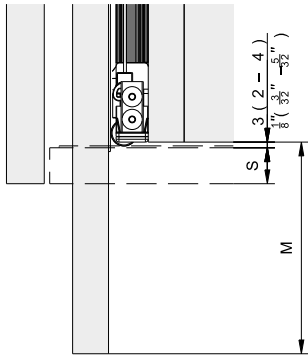

Instructions

Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.