


Hardware for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


Technical specifications

- 10–35 kg (22 to 77 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")

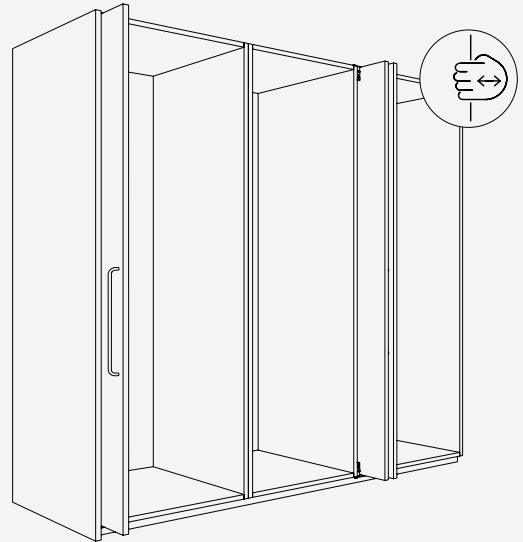



Installation examples

Door striking against the top and bottom cabinet sections

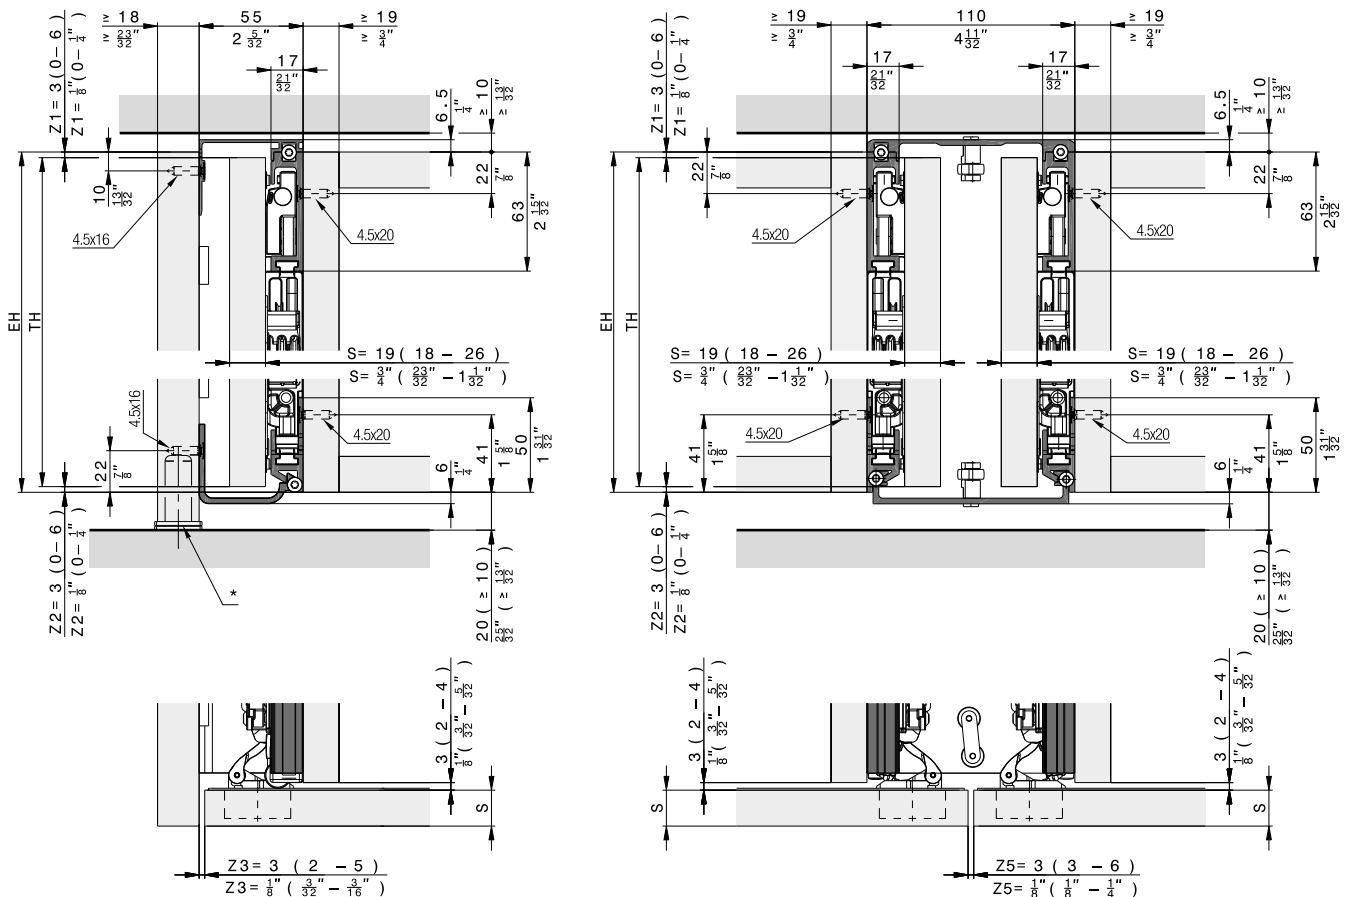

* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III 35 Pull, left

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Hawa Concepta III 35 Pull, right

	No.
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta

	440	500	550	600	650	700	750
2700	35	35	35	35	35	35	35
2650	35	35	35	35	35	35	35
2600	35	35	35	35	35	35	35
2550	35	35	35	35	35	35	35
2500	35	35	35	35	35	35	35
2450	35	35	35	35	35	35	34
2400	35	35	35	35	35	35	33
2350	35	35	35	35	35	34	32
2300	35	35	35	35	35	34	31
2250	35	35	35	35	35	33	31
2200	35	35	35	35	34	32	30
2150	35	35	35	35	33	31	29
2100	35	35	35	35	32	30	28
2050	35	35	35	34	31	29	27
2000	35	35	35	33	30	28	26
1950	35	35	35	32	29	27	26
1900	35	35	34	31	29	27	25

DE Türgewicht in kg / FR Poids de porte en kg /
EN Door weight in kg / IT Peso anta in kg /
ES Peso de puerta en kg

	1' 5" ⁵ / ₁₆ "	1' 7" ¹¹ / ₁₆ "	1' 9" ²¹ / ₃₂ "	1' 11" ⁵ / ₈ "	2' 1" ¹⁹ / ₃₂ "	2' 3" ⁹ / ₁₆ "	2' 5" ¹⁷ / ₃₂ "
8' 10" ⁵ / ₁₆ "	77	77	77	77	77	77	77
8' 8" ¹¹ / ₃₂ "	77	77	77	77	77	77	77
8' 6" ⁹ / ₁₆ "	77	77	77	77	77	77	77
8' 4" ¹³ / ₃₂ "	77	77	77	77	77	77	77
8' 2" ⁷ / ₁₆ "	77	77	77	77	77	77	77
8' 0" ¹⁵ / ₃₂ "	77	77	77	77	77	77	75
7' 10" ¹ / ₂ "	77	77	77	77	77	77	73
7' 8" ¹⁷ / ₃₂ "	77	77	77	77	77	75	71
7' 6" ⁹ / ₁₆ "	77	77	77	77	77	75	68
7' 4" ¹⁹ / ₃₂ "	77	77	77	77	77	73	68
7' 2" ⁵ / ₈ "	77	77	77	77	75	71	66
7' 0" ²¹ / ₃₂ "	77	77	77	77	73	68	64
6' 10" ¹¹ / ₁₆ "	77	77	77	77	71	66	62
6' 8" ²³ / ₃₂ "	77	77	77	75	68	64	60
6' 6" ³ / ₄ "	77	77	77	73	66	62	57
6' 4" ²⁵ / ₃₂ "	77	77	77	71	64	60	57
6' 2" ¹³ / ₁₆ "	77	77	75	68	64	60	55




DE Türgewicht in lbs. / FR Poids de porte en lbs. /
EN Door weight in lbs. / IT Peso anta in lbs. /
ES Peso de puerta en lbs.

Hawa Configurator

List of individual parts, which are included in the sets



Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997

		30996	30997	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces	1	1	31585
	Set of adjusting tools	1	1	31047
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set





	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, right	31001

		31000	31001	No.
Set consisting of:				
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

		Nr.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16")	31005
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16")	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16")	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16")	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32")	31007

Guides

	No.
	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

		Nr.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079


Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, anodized	056.3192.082
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1215 mm (3' 11 27/32")	056.3192.080




Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081



Straightening fitting

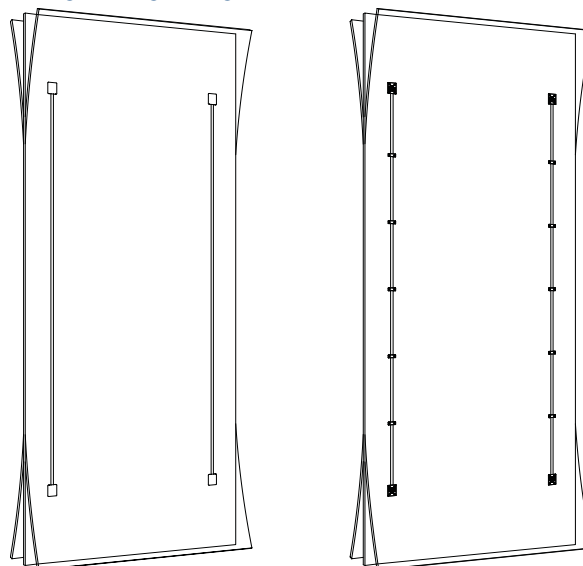

Further installation examples Composed cabinet

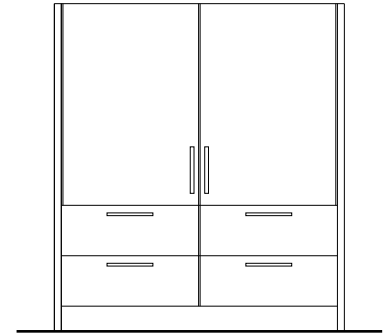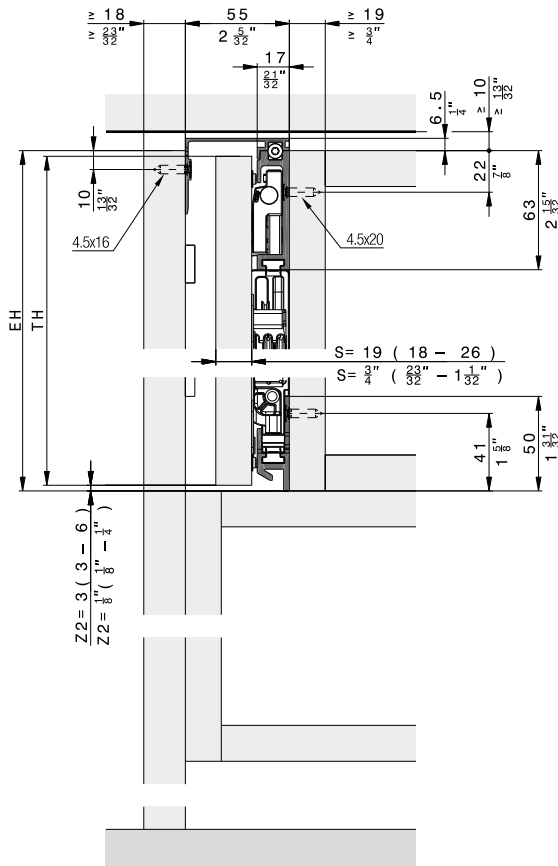


Cabinet without base panel

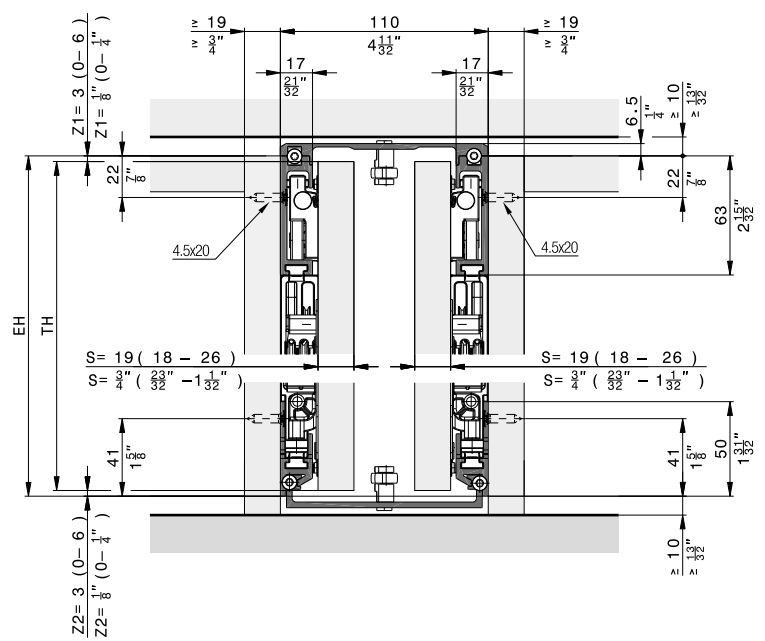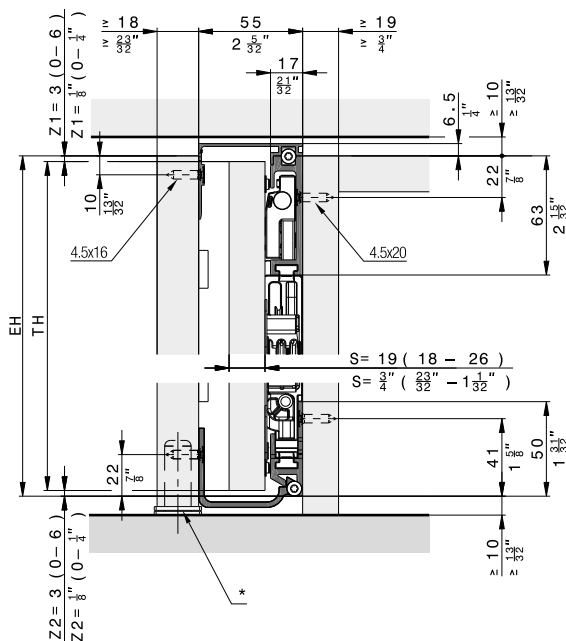


* Recommendation: Use adjustable foot


Inlaid doors

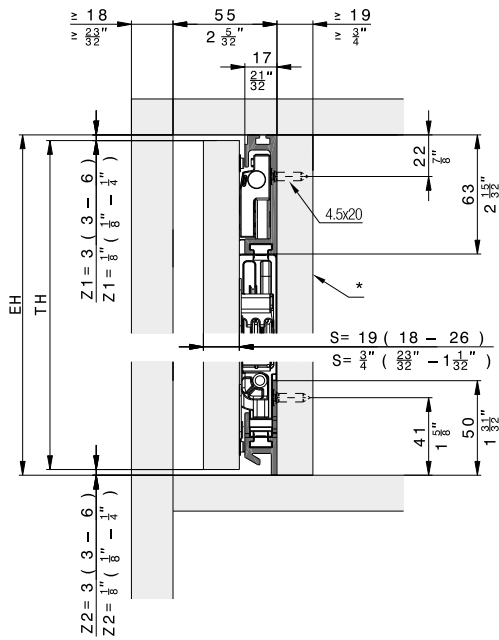

* removable

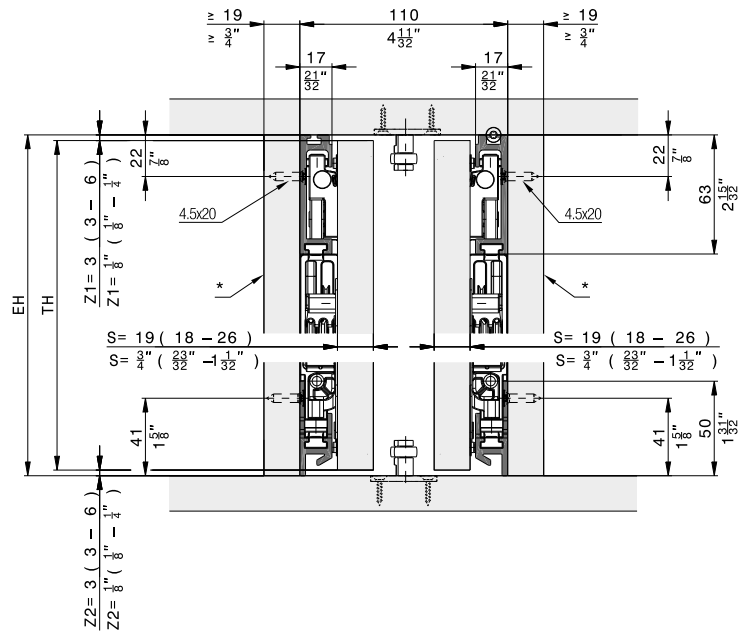


Floor-to-ceiling doors

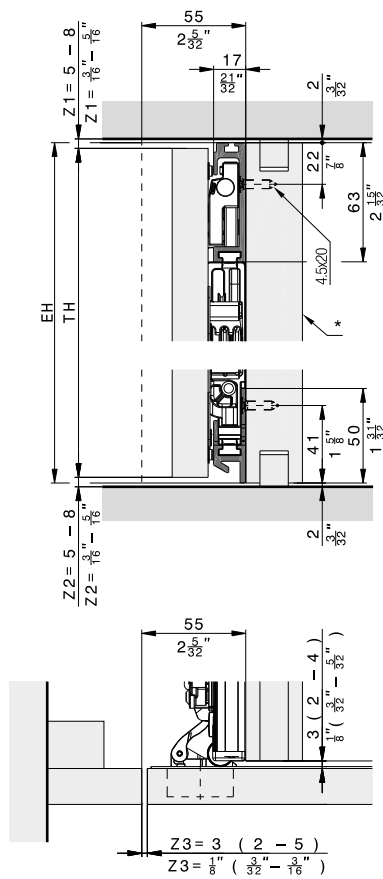

* removable


Hardware depth calculation

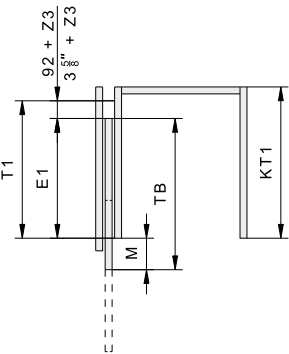


	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₁₆ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

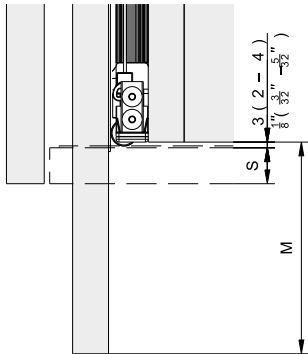

Instructions

Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.