


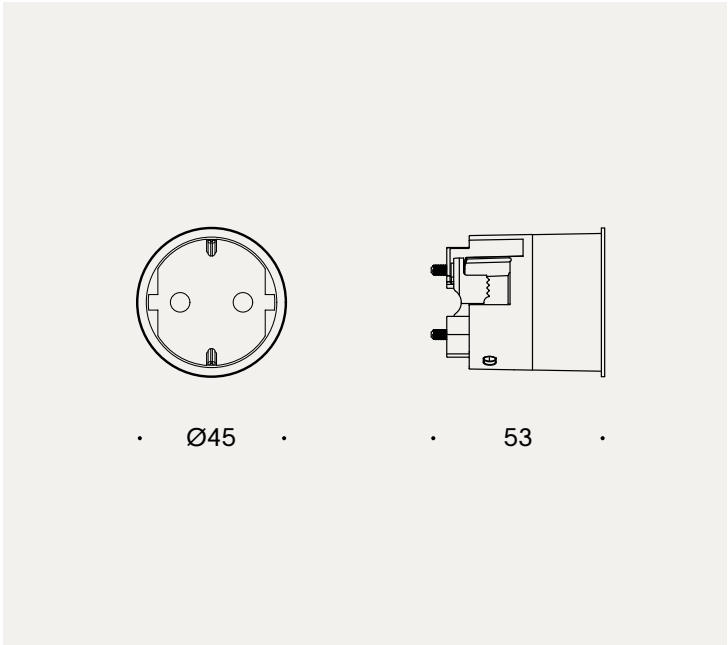

unifit hardwired Ø45 type F

[installation instructions](#)

socket specs		
application	16A / 250V	
flush mount depth	53 mm	
wire stripping length	13.8 mm	
wire capacity	up to 4 x 2.5 mm² per terminal	
wire fixation	screw terminals (TX8)	
ambient temperature	-5 till +40°C	
IP - / IK rating	IP21-D	IK06
marking	CE	

order number		
unifit hardwired	type F	
	Ø45	
black	4242-1001	
white	4242-1002	
cream	4242-1003	

mounting dimensions		
installation hole	Ø42 mm	
flush mount countersink	Ø45.4 x 1 mm depth	
panel thickness	16-32 mm (adjustable lugs)	

accessories		
adjustable plaster ring (unifit type E/F)	4200-1000	